




EBC 61

FEATURES

- Low service costs
- Long life
- Available in all climate classes

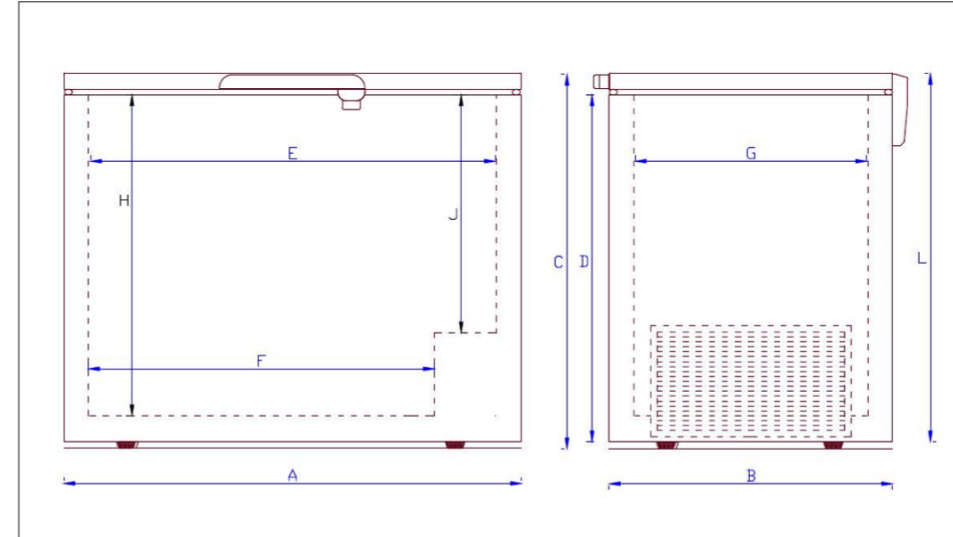

| EBC COOLER |

RELIABLE AND TRADITIONAL STORAGE



	EBC 22	EBC 35	EBC 45	EBC 53	EBC 61
Ambient temperature range	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	215	347	447	527	607
Net volume, litres	205	331	427	504	580
Temperature range inside unit	+2 to +8	-30 to -60	+2 to +8	+2 to +8	+2 to +8
Refrigerant: R134a	Yes	Yes	Yes	Yes	Yes
Energy cons. / 24 h kwh at 18 deg. C	0,71	0,9	1,05	1,3	1,52
Input power (watt)	124	141	146	211	211
DIMENSIONS					
External dimensions (WxDxH)	725x655x865	1055x655x865	1305x655x865	1505x655x865	1705x655x865
Internal dimensions (WxDxH)	606x536x745	936x536x745	1186x536x745	1386x536x745	1586x536x745
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	606	936	1186	1386	1586
Dimension F	406	736	986	1186	1386
Dimension G	536	536	536	536	536
Dimension H	697	697	697	697	697
Dimension J	447	447	447	447	447
Dimension L	850	850	850	850	850
Insulation, mm	60	60	60	60	60
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Baskets Incl.	1	2	2	3	3
Max. number of baskets possible	2	2	4	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Not Incl.	Not Incl.	Not Incl.	Not Incl.	Not Incl.
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz	220 v/ 50 Hz
Power 110 v/ 60 Hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Analog	Analog	Analog	Analog	Analog
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	62	61	52
Standard Trailer capacity	102	74	60	52	44



EBC 22



EBC 35



EBC 45



EBC 53



EBC 61

